



Timeless design, for generations

JINDARA WOODHEATING
2020 CATALOGUE



MANUFACTURED &
DESIGNED IN AUSTRALIA





*Quality
Guarantee*

All of our heaters are built to last.
That's why we guarantee all of
our fireboxes to last 10 years*.

*Excludes Jindara Cottage

Classic Australian wood heaters with world-class performance

Immerse yourself in the dynamic range of Jindara woodheaters. Proudly crafted over four generations in country Victoria.

Freestanding Woodheaters

Outback Series	4
Radiant Series	7
Paramount Series	12
Platinum Series	14

Insert Woodheaters

Outback Series	16
Paramount Series	17
Platinum Series	18

Double Sided Range

Double Sided Range	20
--------------------	----

Zero Clearance Installation	22
Elevated Insert Installations	22
Specifications	23



MANUFACTURED &
DESIGNED IN AUSTRALIA

Freestanding Outback Series

With clever design features and Jindara’s pre-heated primary air technology, the freestanding Outback Series is certain to impress. Loading firewood has never been easier, with the flat-window models encompassing a tall ergonomic pedestal. Should you simply wish to be absorbed by the flickering flames, the elegant bay window models will provide a stunning view.



- ⊕ 3-Speed fan
- ⊕ Firebrick lined
- ⊕ 8mm steel baffle plate
- ⊕ Tall pedestal for easy loading
- ⊕ 10 Year firebox warranty

Riverina
180

		
Capacity 180m ²	Log Width 490mm	Flue Size 150mm
Efficiency 69%†	Emissions 0.9g/kg	Output 14kW‡

Barossa
260

		
Capacity 260m ²	Log Width 545mm	Flue Size 150mm
Efficiency 72%†	Emissions 1.4g/kg	Output 21kW‡

Barwon
320

		
Capacity 320m ²	Log Width 620mm	Flue Size 175mm
Efficiency 65%†	Emissions 1.3g/kg	Output 24kW‡



- ⊕ 3-Speed fan
- ⊕ Firebrick lined
- ⊕ 8mm steel baffle plate
- ⊕ Dual pre-heated primary air
- ⊕ Cool-touch casing
- ⊕ 10 Year firebox warranty

Sorrento 220

		
Capacity 220m ²	Log Width 565mm	Flue Size 150mm
Efficiency 73%†	Emissions 1.0g/kg	Output 15kW‡

Pyrenees 300

		
Capacity 300m ²	Log Width 630mm	Flue Size 150mm
Efficiency 65%†	Emissions 1.3g/kg	Output 17kW‡

Mallee 350

		
Capacity 350m ²	Log Width 630mm	Flue Size 175mm
Efficiency 66%†	Emissions 0.9g/kg	Output 20kW‡

Freestanding Woodheaters



Freestanding Radiant Series

Sure to become a design icon — the new, sleek and modern Jindara Radiant series provides all the benefits of radiant style wood heating. Perfect for homes with poor insulation or high ceilings, Radiant heaters emit heat directly through the outer surface of the firebox, rapidly warming your space.



*Pictured above without standard rear heat shield

- ⊕ Firebrick lined
- ⊕ Dual baffle system featuring 8mm primary baffle
- ⊕ "Boost Air" inlet for easier ignition
- ⊕ Heavy duty cast iron door
- ⊕ 10 Year firebox warranty

**Franklin
160**

**COMING
MARCH 2020**

Refer to www.jindara.com.au for updates & specifications

**Townsend
240**



Capacity
240m²



Log Width
535mm



Flue Size
150mm

Efficiency
68%†

Emissions
0.9g/kg

Output
12kW‡

**Gawler
320**



Capacity
320m²



Log Width
570mm



Flue Size
150mm

Efficiency
66%†

Emissions
1.0g/kg

Output
14kW‡

A woman with long brown hair, wearing a white fuzzy cardigan, is lying on a patterned couch reading a book. The book's cover has the text "HAVE TO BE AT WORK" in red. In the background, there is a wooden shelf with a vase of white flowers and a framed photo. A lamp is visible on the left.

Unwind in the vibrant
warmth of a Jindara



Effortlessly practical...
thoroughly enjoyable



Freestanding Woodheaters



Sturt

The Jindara Sturt is known all around Australia for its functionality and hardworking nature. This tough as nails radiant style unit has an exceptionally deep firebox, allowing you to fit logs that similar sized units would be envious of. The Sturt also incorporates a radiant cook top for your pots and pans, as well as a raised shelf for simmering. The Jindara Sturt truly is a tireless contributor to any Aussie home.

- ⊕ Boil & simmer on top or back shelf
- ⊕ Firebrick lined
- ⊕ Extra deep firebox for easy loading
- ⊕ 10 Year firebox warranty
- ⊕ Optional 3-speed fan

		
Capacity	Log Width	Flue Size
180m ²	485mm	150mm
Efficiency	Emissions	Output
69%†	1.1g/kg	16kW‡



Cottage

The Jindara's Cottage hot plate gives the versatility of stove top cooking, whilst the functional oven roasts or bakes your favourite winter treats. The firebox itself provides a radiant heating capacity of up to 120m², making the Cottage a superb addition to your kitchen or family room whatever the season.

- ⊕ Hot plate for boiling/simmering
- ⊕ Oven for baking
- ⊕ Firebrick lined
- ⊕ 8mm steel baffle plate

		
Capacity	Log Width	Flue Size
120m ²	490mm	150mm
Efficiency	Emissions	Output
N/A	N/A	N/A



Homestead

The Jindara Homestead makes your wood storage simple, providing you with ample space to store your logs for those next few burns. Whilst utilising the same firebox as the Jindara Riverina, the Homestead has the added benefit of being easier to load, as it is taller in size.

- ⊕ 3-Speed fan
- ⊕ Firebrick lined
- ⊕ 8mm steel baffle plate
- ⊕ Large wood storage box
- ⊕ Tall unit for easy loading
- ⊕ Identical firebox to Riverina
- ⊕ 10 Year firebox Warranty

		
Capacity	Log Width	Flue Size
180m ²	490mm	150mm
Efficiency	Emissions	Output
69%†	0.9g/kg	14kW‡

Freestanding Paramount Series

The ultra-reliable Paramount series range has been the cornerstone of Jindara Woodheating for years – and it’s not hard to see why. These cast-iron lined heaters have been warming Australian homes through the depths of winter for generations, without a hint of fuss.



- ⊕ 3-Speed fan
- ⊕ Cast iron lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Minimal clearances

Kimberley
240

		
Capacity	Log Width	Flue Size
240m ²	515mm	150mm
Efficiency	Emissions	Output
69%†	1.0g/kg	13kW‡

Hamersley
300

		
Capacity	Log Width	Flue Size
300m ²	570mm	150mm
Efficiency	Emissions	Output
69%†	1.2g/kg	16kW‡



Freestanding Platinum Series

Why compromise between classic and modern style! The Platinum Series range is perfect for those looking to invest in a striking centre piece for their home, guaranteeing dependable heat for many winters to come.



- ⊕ Sleek & modern design
- ⊕ 3-Speed fan with thermostatic switch
- ⊕ Cast iron lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Dual pre-heated primary air
- ⊕ Dual-action handle latch

Tilga Freestanding 260

		
Capacity 260m ²	Log Width 540mm	Flue Size 150mm
Efficiency 80%†	Emissions 0.9g/kg	Output 16kW‡

Grange Freestanding 330

		
Capacity 330m ²	Log Width 595mm	Flue Size 150mm
Efficiency 76%†	Emissions 1.3g/kg	Output 17kW‡



- ⊕ Sleek & modern design
- ⊕ 1200mm bench option
- ⊕ 3-Speed fan with thermostatic switch
- ⊕ Cast iron lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Dual pre-heated primary air
- ⊕ Dual-action handle latch

Tilga Modular 260

		
Capacity 260m ²	Log Width 540mm	Flue Size 150mm
Efficiency 80%†	Emissions 0.9g/kg	Output 16kW‡

Grange Modular 330

		
Capacity 330m ²	Log Width 595mm	Flue Size 150mm
Efficiency 76%†	Emissions 1.3g/kg	Output 17kW‡

Insert Outback Series

Turn a draughty open fireplace into a highly efficient heat source! Designed with functionality, efficiency and durability in mind, the Outback series inbuilt range will keep you warm through the coldest, darkest winters.



- ⊕ 3-Speed fan
- ⊕ Firebrick lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Zero clearance compatible

Riverina 160

		
Capacity 160m ²	Log Width 490mm	Flue Size 150mm
Efficiency 72%†	Emissions 0.9g/kg	Output 14kW‡

Barossa 240

		
Capacity 240m ²	Log Width 545mm	Flue Size 150mm
Efficiency 67%†	Emissions 1.5g/kg	Output 17kW‡

Barwon 280

		
Capacity 280m ²	Log Width 620mm	Flue Size 175mm
Efficiency 65%†	Emissions 1.4g/kg	Output 21kW‡



Insert

Paramount Series

The Paramount Series has been the cornerstone of Jindara Woodheating for many years and for good reason. These cast-iron lined woodheaters with a simple traditional design can be trusted to keep your home warm on even the coldest of winter nights, year after year.



**Kimberley
220**

- ⊕ 3-Speed fan
- ⊕ Cast iron lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Zero clearance compatible

		
Capacity 220m ²	Log Width 515mm	Flue Size 150mm
Efficiency 65%†	Emissions 0.3g/kg	Output 12kW‡

**Hamersley
260**

		
Capacity 260m ²	Log Width 570mm	Flue Size 150mm
Efficiency 64%†	Emissions 1.0g/kg	Output 15kW‡

Federation



- ⊕ 3-Speed fan
- ⊕ Cast iron lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Alloy fascia & timber mantle option (pictured, left)
- ⊕ Zero clearance compatible

		
Capacity 260m ²	Log Width 570mm	Flue Size 150mm
Efficiency 64%†	Emissions 1.0g/kg	Output 15kW‡

Insert Platinum Series

The apex of Australian wood heating! This visually striking series offers the very best of Jindara design, functionality and endeavour. Their narrow fascia's allow the heater to sit neatly within your wall or fireplace. Take comfort as the warmth is generously distributed throughout your home.



- ⊕ Sleek & modern design
- ⊕ 3-Speed fan with thermostatic switch
- ⊕ Cast iron lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Dual pre-heated primary air
- ⊕ Dual-action handle latch
- ⊕ Zero Clearance option features "flush-fit" fascia (3mm)

Tilga
240

		
Capacity	Log Width	Flue Size
240m ²	540mm	150mm
Efficiency	Emissions	Output
74%†	1.0g/kg	12kW‡

Grange
300

		
Capacity	Log Width	Flue Size
300m ²	585mm	150mm
Efficiency	Emissions	Output
68%†	1.4g/kg	15kW‡





Double Sided Range

These heaters truly provide a heart for any home. Whether you’re looking for a powerful heating source, a luxurious centrepiece, or the flamed vitality of a wood burning heater — this range gives incredible flexibility and warmth in multiple rooms (capable of heating up to 420m²).

For further double sided range installation options, such as dual room functionality, speak to your local dealer, or download the Double Sided Reference guide at www.jindara.com.au



*Gold door optional

Duplicity 400

- ⊕ 2x 3-speed fans
- ⊕ Firebrick lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Through-wall & Masonry cavity options available

		
Capacity	Log Width	Flue Size
400m²	670mm	175mm
Efficiency	Emissions	Output
67%†	1.4g/kg	24kW‡



Spectre 420 (Freestanding)

- ⊕ 2x 3-speed fans with thermostatic switch
- ⊕ Cast iron lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Dual-action handle latch
- ⊕ Dual pre-heated primary air
- ⊕ Through-wall options available

		
Capacity	Log Width	Flue Size
420m²	585mm	175mm
Efficiency	Emissions	Output
62%†	1.2g/kg	25+kW‡



Spectre 400 (Insert)

- ⊕ 2x 3-speed fans with thermostatic switch
- ⊕ Cast iron lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Dual-action handle latch
- ⊕ Dual pre-heated primary air
- ⊕ Masonry installation only

		
Capacity 400m ²	Log Width 530mm	Flue Size 175mm
Efficiency 62%†	Emissions 1.2g/kg	Output 25+kW‡



Spectre 420 (Modular)


- ⊕ 2x 3-speed fans with thermostatic switch
- ⊕ Cast iron lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Dual-action handle latch
- ⊕ Dual pre-heated primary air
- ⊕ 1200mm bench option

		
Capacity 420m ²	Log Width 530mm	Flue Size 175mm
Efficiency 62%†	Emissions 1.2g/kg	Output 25+kW‡

Zero Clearance Installation

Don't have a brick chimney, but love the sleek look of a Jindara Insert? All of the Jindara Inserts (exc. double sided range) are Zero Clearance Install compatible using the relevant Jindara Zero Clearance Cabinet. This allows for a broader range of ways to incorporate a Jindara Insert heater into your living space.

Step 1

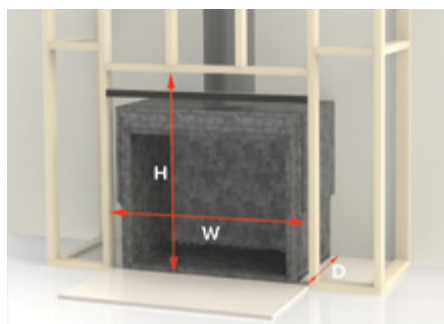

Step 2



Step 3



Minimum Zero Clearance Framing Dimensions

Model	H	W	D
Riverina, Barossa	810	916	565
Kimberley, Hamersley, Federation	1063	1036	595
Barwon	868	1035	570
Tilga	1000	915	635
Grange	1000	1055	610

Specifications detail minimum framework opening (inclusive of clearance from Zero Box to combustible framework)

A Zero Clearance Cabinet allows for safe installation into timber framework with minimal clearances to the unit. Once your framework is built, it is as simple as cladding the front face with a cement sheet or equivalent, and your Jindara Insert heater is safely installed as a focal point to your room.


Minimum framing dimensions are an indicative guide only. **DO NOT** begin any construction prior to consulting the full Zero Clearance Installation guide for the relevant unit. Full Installation instructions available at www.jindara.com.au

Elevated Insert Installations

Raising your Jindara Insert installation above floor level? You may be able to reduce your minimum hearth depth to 300mm. Refer to the following table as a guide on how high your unit must be raised to achieve the reduced hearth depth.



	REF	RIVERINA		BAROSSA		BARWON		KIMBERLEY		HAMERSLEY/ FEDERATION		TILGA		GRANGE	
Hearth width	X	890mm (min.)		950mm (min.)		1035mm (min.)		940mm (min.)		1000mm (min.)		945mm (min.)		1000mm (min.)	
Hearth raised	Y	0mm	155mm (min.)	0mm	132mm (min.)	0mm	197mm (min.)	0mm	175mm (min.)	0mm	205mm (min.)	0mm	175mm (min.)	0mm	140mm (min.)
Hearth depth from front of fascia	Z	530mm (min.)	300mm (min.)	510mm (min.)	300mm (min.)	610mm (min.)	300mm (min.)	550mm (min.)	300mm (min.)	600mm (min.)	300mm (min.)	520mm (min.)	300mm (min.)	550mm (min.)	300mm (min.)

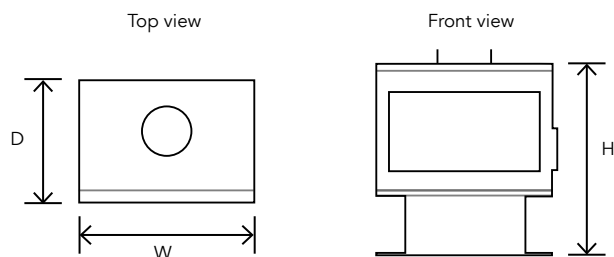


Freestanding Specifications

Dimensions & clearances	Flue type	Overall dimensions width/height/depth			Back of Woodheater to Flue Centre	Clearance to Combustibles			Minimum hearth size width/depth/thickness			
		W	H	D		Rear	Side	Corner	W	D	T	mm in front of unit
Freestanding models	Solid / perforated				mm							
Franklin	Perforated	COMING MARCH 2020 – Refer to www.jindara.com.au for updates & specifications										
Franklin	Half Shield											
Townsend	Perforated	640	730	502	176	250*	750	500 / 350**	820	1060	24	550
Townsend	Half Shield	640	730	502	176	300	825	475 / 300**	820	1060	24	550
Gawler	Perforated	675	770	557	196	200*	825	550 / 425**	820	1140	30	600
Gawler	Half Shield	675	770	557	196	350	900	575 / 475**	820	1140	30	600
Riverina	Perforated	650	800	508	180	125*	325	150	890	960	12	400
Barossa	Perforated	710	937	570	180	150*	400	175	950	1050	18	400
Barwon	Perforated	782	1008	570	180	150*	450	200	1020	1100	20	450
Sorrento	Perforated	655	745	610	170	150	450	125	900	1070	4.5	300
Pyrenees	Perforated	775	795	595	165	100	330	50	1170	1020	4	300
Mallee	Perforated	850	825	620	180	100*	425	100	960	1075	6	450
Sturt	Perforated	610	660	650	175	50	550	170	770	910	9	300
Cottage	Perforated	650	865	560	110	175	350	200	890	1095	12	350
Homestead	Perforated	660	870	508	180	175	400	225	890	985	6	350
Kimberley	Perforated	707	760	570	185	100	250	25	940	940	9	300
Kimberley	Half Shield	707	760	570	185	150	425	150	940	940	9	300
Hamersley	Perforated	770	787	570	200	100*	450	50	1000	1100	24	530
Hamersley	Half Shield	770	787	570	200	125	475	225	1000	1090	24	520
Tilga	Solid/Perforated	690	765	548	205	155/50*	325	50/75	945	1000/895	9	300
Grange	Solid/Perforated	748	828	548	205	50*	325	50	1000	895	9	300
Duplicity	Perforated	810	792	810	N/A	N/A	350	N/A	1000	1800	12	500
Spectre	Solid/Perforated	695	765	745	N/A	N/A	330	N/A	940	1590	6	460

*Standard flue shield kit must be installed to achieve minimum rear wall clearance (included in woodheaters, excluding Franklin, Townsend, Gawler)


**Requires additional side wing heat shields to achieve minimum corner clearance (purchased separately)

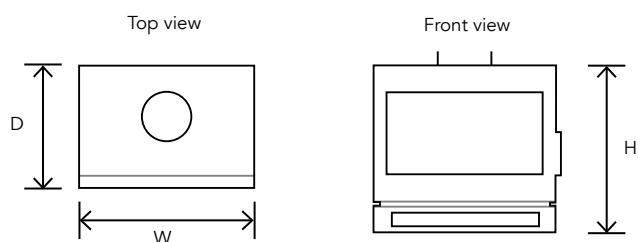

Modular Specifications

Dimensions & clearances	Flue type	Overall dimensions width/height/depth			Back of Woodheater to Flue Centre	Clearance to Combustibles			Minimum hearth size width/depth/thickness			
		W	H	D		Rear	Side	Corner	W	D	T	mm in front of unit
Modular models	Solid / perforated				mm							
Tilga	Solid/Perforated	690	635	548	205	155/50*	325	50/75	945	1005/900	140	330
Grange	Solid/Perforated	748	676	548	205	50*	325	50	1000	895	140	330
Spectre	Solid/Perforated	695	653	745	N/A	N/A	475	N/A	940	1890	32	570
Tilga w/ Bench	Solid/Perforated	690	635	548	205	155/50*	325	50/75	945	1005/900	9	330
Grange w/ Bench	Solid/Perforated	748	676	548	205	50*	325	50	1000	895	9	330
Spectre w/ Bench	Solid/Perforated	695	653	745	N/A	N/A	475	N/A	940	1375	6	330
Tilga/Grange Bench	–	1200	280	550	–	–	–	–	–	–	–	–
Spectre Bench	–	1200	280	775	–	–	–	–	–	–	–	–

*Standard flue shield kit must be installed to achieve rear wall clearance (included in woodheater)

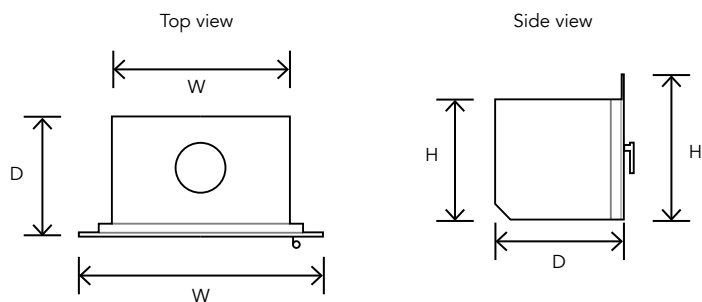

Insert Specifications

Dimensions & clearances	Overall dimensions width/height/depth			Rear casing dimensions			Clearance to combustibles — from base of appliance			Minimum hearth size				Back of fascia to flue centre
										Masonry installation			ZCC install	
Insert Models	W	H	Fascia Depth	W	H	D	Side	To Mantle Shelf	To Breast Plate	W	D	T	mm in front of ZCB***	mm
Riverina	882	750	42	570	595	365	50	1100	1040	890	530*	12	570*	232
Barossa	922	758	42	631	635	430	50	1390	1340	950	510*	12	550*	296
Barwon	994	828	42	700	706	430	50	1545	1545	1035	610*	18	650*	295
Kimberley	950	740	65	605	600	440	25	1170	1080	940	550*	18	610*	290
Hamersley	1010	750	105	665	630	430	150	1225	975	1000	600*	18	705*	257
Federation	1028	730	60	665	630	475	150	1225	975	1000	600*	18	660*	300
Tilga Masonry	855	640	16	751	595	484	55	1500**	1410	945	550*	18	550*	326
Tilga ZC	850	674	3	Refer to ZC Install Guide			55	1500**	1410	945	N/A	18	550*	N/A
Grange Masonry	935	705	16	808	651	484	35	1500**	1410	1000	520*	18	520*	326
Grange ZC	930	736	3	Refer to ZC Install Guide			35	1500**	1410	1000	N/A	18	520*	N/A
Spectre	875	692	16	751	644	708	205	1127	1127	940	1890*	32	570*	354

* Minimum hearth depth in front of unit can be reduced by raising the appliance above combustible materials (Consult your local dealer and/or page 22 of this brochure)

** Mantle deflector required to achieve mantle clearance (included with woodheater)

*** Hearth must also be installed beneath ZCC - refer to install guide for exact specifications

Notes: ‡ All KW Outputs quoted are Peak Power. † All Efficiencies quoted are Peak Efficiency %. All dimensions are in mm. Dimensions and clearances shown are for reference only. Refer to the Owner's Manual for exact specifications prior to installation.

All information in this brochure was correct at the time of printing, February 2020, however Jindara Woodheating reserves the right to change specifications without notice. Colours shown are as close as printing method allow. Installation should be carried out by a qualified installer. All fireplace inserts must be installed into a masonry chimney or Jindara Zero Clearance Cabinet, and be fully flued.

Your local Jindara dealer



AF Gason Pty Ltd
Phone: 03 9763 2700
Fax: 03 9763 0836
heating@gason.com.au

www.jindara.com.au